


# **PACEPACKER SERVICES**



Automation with imagination....

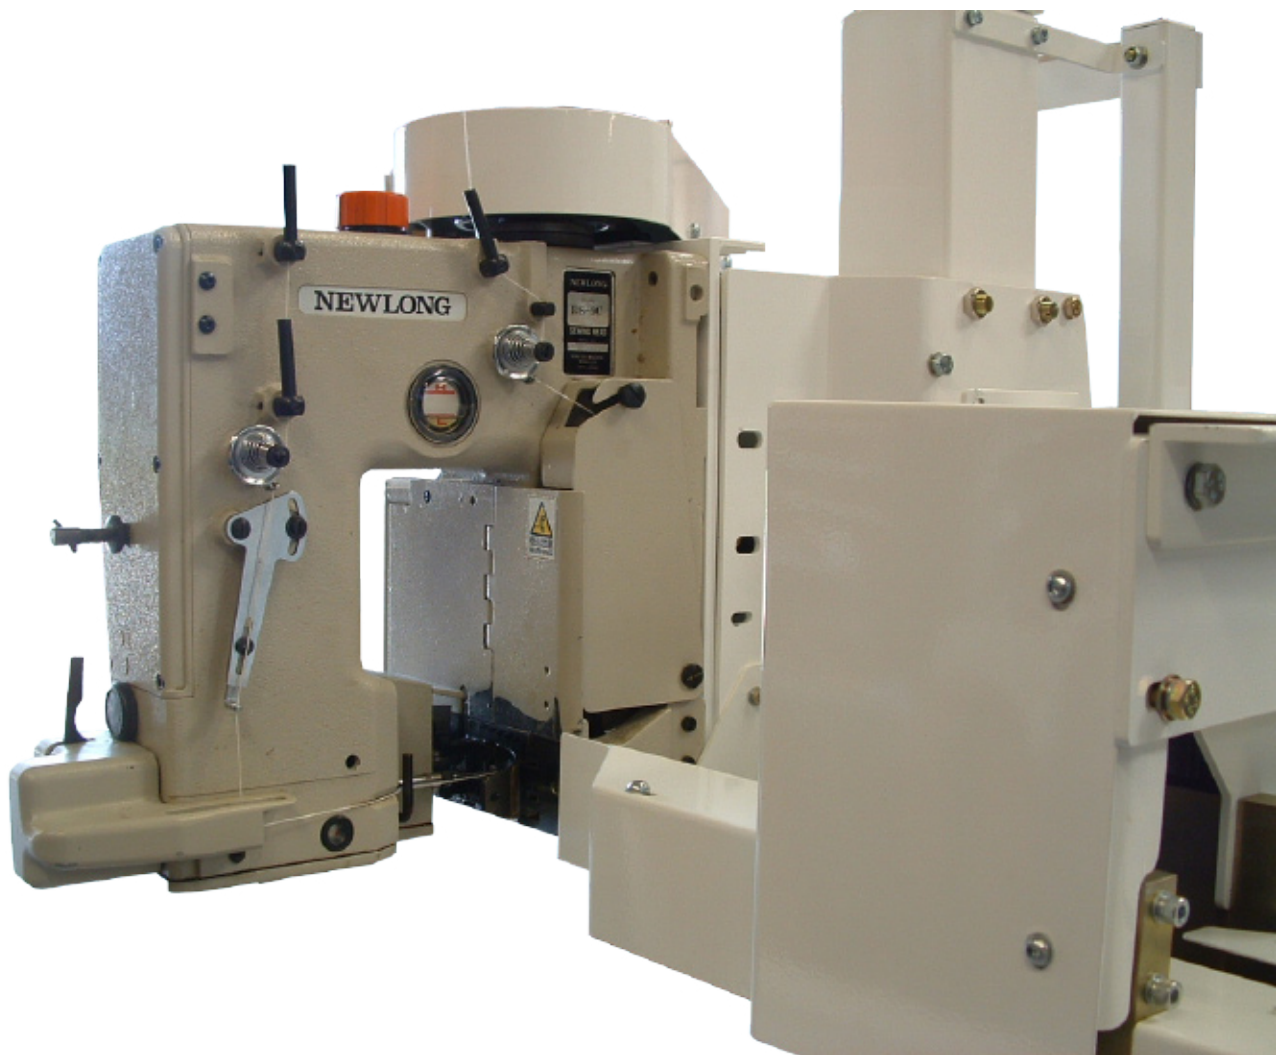

## **SEALING SYSTEMS**

STITCHERS, HEAT SEALERS AND PRESENTATION EQUIPMENT FOR  
EXISTING SYSTEMS OR AS STAND-A-LONE UNITS.

---

**PACEPACKER**

**Operation**

Floor or Conveyor mounted robust steel frames that are available with or without height adjustment, supporting a modern stitcher, heat sealer or presenter. Pacepacker Services normally supply Fischbein or Newlong Sewing Heads and Fischbein Saxon or OK Heat Sealers, although we have worked with many others besides. Units can be incorporated into your existing Pacepacker system or as a stand-alone unit to position over a conveyor.

**Options**

Height Adjustable Frames
Stitcher Automators, Presenters & Belt Feeders
Floor Bolts Or Trolley Wheels For Mobility
Inverter Speed Control
Single Or Double Ticket Dispenser

**Control System**

Stand-alone systems are supplied with a control panel containing a PLC which links to an infeed sensor to control start/stop times. Fischbein Saxon and OK Heat Sealers are supplied with a bare lead for connecting to your own supply and are available in 3 Phase or Single Phase.

**Conveyors & Packing Speeds**

Systems work with almost any leg mounted conveyor and sealing speeds are matched as required or can be adjustable via Inverters.

**Sack Specification**



Most commercial quality paper, plastic, WPP and laminated sacks are acceptable, providing they are in good condition and are presented neatly. Multiwall paper sacks must be pasted between layers. Plastic sacks must be between 100 and 200 Micron. (400-800 Gauge), must be dry and free from static.

**Electrical Requirements**

Standard: 415V, 50/60 Hertz 3 Phase, 5 Amp Supply for stitcher. Standard: 415V or 240V 50/60 Hertz 3 Phase, 10 Amp Supply for Heat Sealer. Alternatives can be accommodated.

**Air Requirements for Stitchers and Automators**

Cool, clean, dry air at 6 bar (90 PSI) at 27Litres (0.5 CuFt) per cycle. I.e. 12 cfm at 12 sacks/min 20mm (3/4") supply pipe minimum.

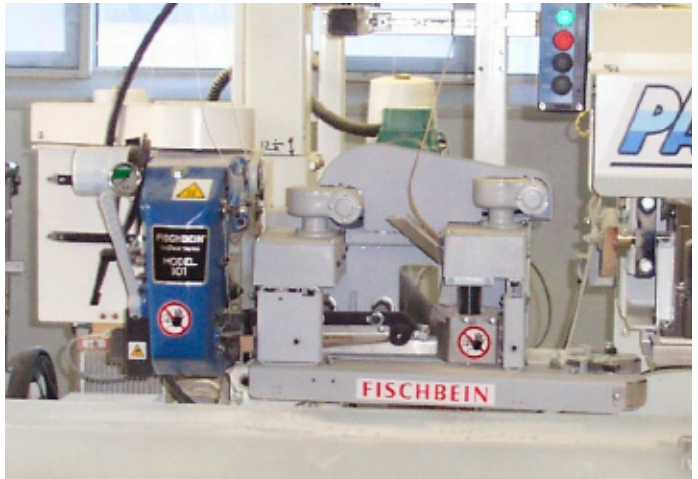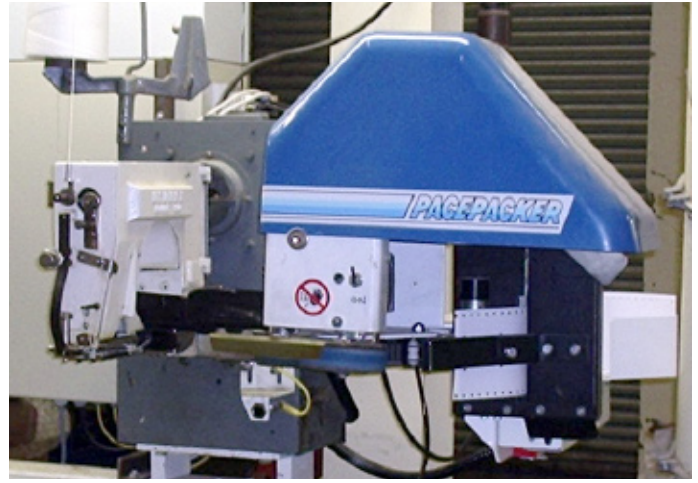

Agent for Australasia



**Active Weighing Solutions**  
Unit 2, 41-49 Norcal Road  
Nunawading Vic 3131  
Ph: 61 3 9873 7677 Fax: 61 3 9873 7655  
Email: sales@activeweighing.com.au  
Web: www.activeweighing.com.au